


LED INTEGRATED TUBE LIGHT



Maximum overall	A	B	C	D
2FT	608mm	598mm	31mm	31mm
3FT	908mm	898mm	31mm	31mm
4FT	1208mm	1198mm	31mm	31mm
5FT	1508mm	1498mm	31mm	31mm
6FT	1808mm	1798mm	31mm	31mm
8FT	2408mm	2398mm	31mm	31mm



FEATURES

Input voltage: AC100-250V

Operating frequency: 50/60Hz

Power factor: ≥ 0.90

Ambient temperature range: $-20^{\circ}\text{C} \sim +40^{\circ}\text{C}$

Color Temp: 3000K~5000K

THD: $< 20\%$

IP Rating: IP20

CRI: $> 80\text{Ra}$



Beam angle: 120°

Cover: Clear, Frosted, Stripy

- Luminous Flux: $> 125\text{lm/w}$
- Housing material: 6063-T5
- Suitable for Damp Location
- Suitable to use in UL approved enclosed fixtures
- 5 years' warranty

PARAMETER

Length (ft)	Product code	Certification	CRI	Wattage	Lumens 3000-5000K	Packing/carton	Weight/carton
2ft	ZS-T8Y0610X	ETL/cETLus, DLC	> 80	10W	1250 lm	650×185×185mm 25pieces 1X40HQ Loading=63,000pcs	5.5kg
2ft	ZS-T8Y0914X		> 80	14W	1680 lm	950×185×185mm 25pieces 1X40HQ Loading=42,000pcs	8kg
4ft	ZS-T8Y1222X	ETL/cETLus, DLC	> 80	22W	2750 lm	1250×185×185mm 25pieces 1X40HQ Loading=31,500pcs	10.5kg
8ft	ZS-T8Y2445X	ETL/cETLus	> 80	45W	5400 lm	2450×185×185mm 25pieces 1X40HQ Loading=14,000pcs	18.5kg
	ZS-T8Y2460X	ETL/cETLus, DLC	> 80	60W	7500 lm		
	ZS-T8Y2472X		> 80	72W	8640 lm		
4ft	ZS-T8W1222X	ETL/cETLus, DLC	> 80	22W	2750 lm	1250×230×160mm 20pieces 1X40HQ Loading=28,800pcs	9.6kg
5ft	ZS-T8W1532X	ETL/cETLus, DLC	> 80	32W	4000 lm	1550×230×160mm 20pieces 1X40HQ Loading=23,000pcs	12.5kg
6ft	ZS-T8W1836X	ETL/cETLus, DLC	> 80	36W	4500 lm	1850×230×160mm 20pieces 1X40HQ Loading=19,000pcs	14.5kg
8ft	ZS-T8W2460X	ETL/cETLus, DLC	> 80	60W	7500 lm	2450×230×160mm 20pieces 1X40HQ Loading=12,800pcs	20kg
	ZS-T8W2472X		> 80	72W	8640 lm		

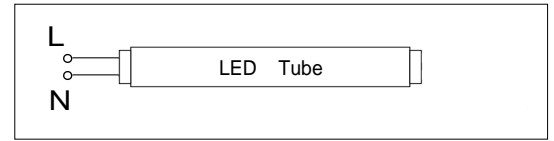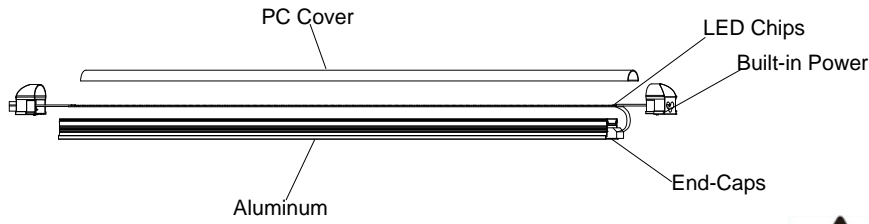


Electric Shock Attention


Ensure the power supply has been cut off before connecting the wire, and all wiring and installation of this product are required to be operated by professionals.

INSTALLATION INSTRUCTION


STEP1. PLACE CLIP KITS AND SCREWS CORRECTLY

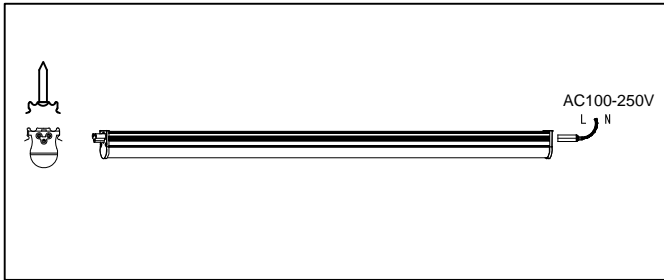


STEP2. FIX THE LED TUBE TO THE CEILING OR WALL

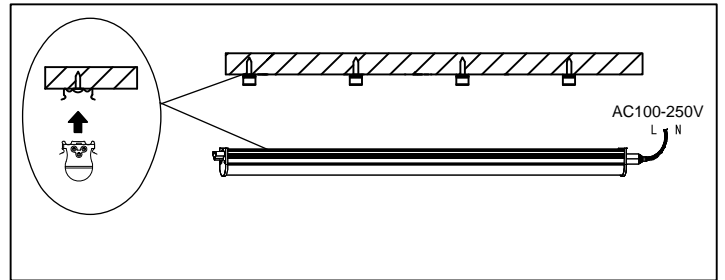


STEP3. CONNECT THE POWER CORD TO THE TUBE

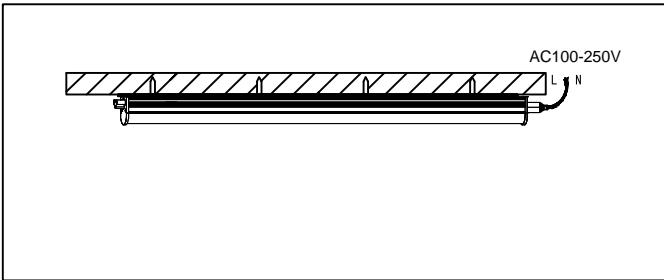

STEP4. CONNECT BY LINKABLE CONNECTOR

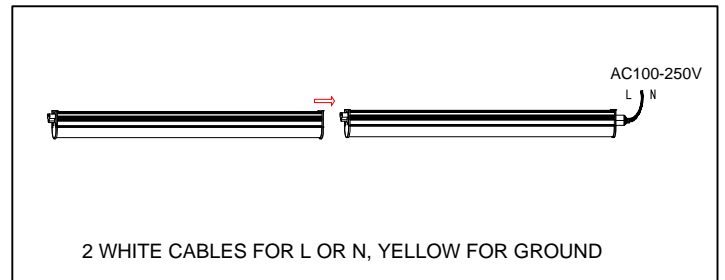

CAUTION: THE INTEGRATED TUBES CAN NOT BE CONNECTED MORE THAN TOTAL PCS



FOR MODEL ZS-T8Y0610 AND SES-T8Y1222, THE MAX CONNECTING QUANTITY OF TUBE IS ≤ 8 PCS.

FOR MODEL ZS-T8Y2445, THE MAX CONNECTING QUANTITY OF TUBE IS ≤ 5 PCS.

FOR MODEL ZS-T8Y2460, WHEN USING RATED 125V/10A POWER SUPPLY WIRE, THE MAX CONNECTING QUANTITY OF TUBE IS ≤ 5 PCS. WHEN USING RATED 250V/2.5A POWER SUPPLY WIRE, THE MAX CONNECTING QUANTITY OF TUBE IS ≤ 3 PCS.

WARNING:

1. DISCONNECT POWER BEFORE INSTALLATION, MUST OPERATED BY ELECTRICIAN
2. TAKE OUT THE TUBE. BEFORE INSTALLATION PLEASE CHECK IF THERE IS ANY UNSATISFACTORY CONDITION OF THE TUBE, SUCH AS WHETHER THE APPEARANCE IS DAMAGED OR DEFORMED, OR THE ACCESSORIES ARE COMPLETE OR NOT.
3. PLEASE USE IT UNDER CORRECT INPUT POWER RANGE
4. THIS TUBE IS NON-DIMMABLE
5. NOT FOR OUTDOOR OR SOME WHERE BE EXPOSED TO RAIN(WATERPROOF TYPE AVAILABLE)
6. IF THE LIGHTS DON'T WORK PROPERLY, PLEASE CHECK THE CONNECTIONS AFTER TURNING OFF THE POWER
7. USE UL APPROVED 3-PIN PLUG.