

**FEATURE**

- Injection-molded thermoplastic ABS housing, UL 94V-0 flame rating.
- Innovative, easy installation in minutes.
- Letters 6" height with 3/4" stroke. RED letters.
- Single or double face(Universal)
- Universal J-box mounting pattern.
- 120V-277VAC Universal voltage operation.
- 2X8pcs ultra bright 2835 SMT LED lamp heads for emergency mode.
- Built-in 3.6V1000mAh Ni-MH battery for minimum 90 minutes emergency operation.
- Maximum 24 hours for full recharge time.  
Test switch and charge indicator.
- UL and cULus listed.
- 0° to 40° C indoor damp location listed.
- Five years warranty for the electrical parts and housing.  
Three years warranty for battery.

FAMILY: **JLECD2RW**

NOTES:

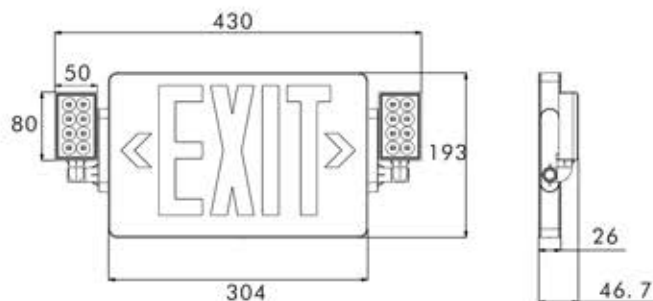
TYPE: **ULTRA THIN EMERGENCY EXIT COMBO**

**ORDERING INFORMATION**

FAMILY	LENS	FACEPLATE	HOUSING COLOR	REMOTE CAPACITY
JLECD2	R(RED)	BLANK(EXIT)	W(WHITE)	BLANK(WITHOUT)
	G(GREEN)	SA(SALIDA)	B(BLACK)	RC(WITH REMOTE)

**PACKING INFORMATION**

MODEL NO.	PACKING INFORMATION	WEIGHTS
JLECD2RW	46x43x21.5cm/8pcs	9.5/8.5kgs
JLECD2GW	46x43x21.5cm/8pcs	9.5/8.5kgs

**ELECTRICAL INFORMATION**

MODEL	RATED VOLTAGE	INPUT CURRENT	INPUT WATT	LED TYPE	CHARGING TIME	EMERGENCY RUN TIME
JLECD2RW	120 - 277V	0.032A	3.3W	2x8pcs ultra bright 2835 SMT LED lamp	24 Hrs	90 Mins
JLECD2GW	120 - 277V	0.032A	3.3W	2x8pcs ultra bright 2835 SMT LED lamp	24 Hrs	90 Mins