



## LED COOLER LIGHT

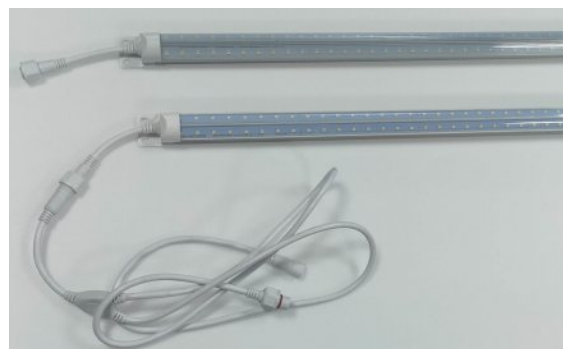

Maximum overall	A	B	C	D
4FT	1292mm	1192mm	32mm	29mm
5FT	1592mm	1492mm	32mm	29mm
6FT	1892mm	1792mm	32mm	29mm

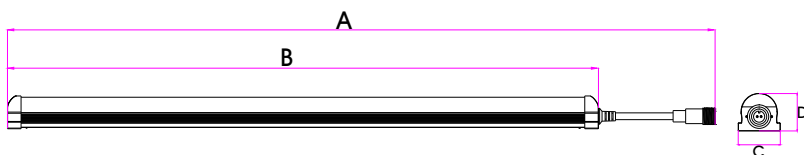

## FEATURES

Input voltage: AC100-250V

Operating frequency: 50/60Hz

Power factor:  $\geq 0.90$

Ambient temperature range:  $-20^{\circ}\text{C} \sim +40^{\circ}\text{C}$

Color Temp: 3000K~5000K

THD:  $< 20\%$

IP Rating: IP20

CRI:  $> 80\text{Ra}$



Beam angle:  $170^{\circ}$

Cover: Clear, Stripy

- Luminous Flux:  $> 125\text{lm/w}$
- Housing material: 6063-T5
- Suitable for Damp Location
- Suitable to use in UL approved enclosed fixtures
- 5 years' warranty

## PARAMETER

Length (ft)	Product code	Certification	CRI	Wattage	Lumens 3000-5000K	Packing/carton	Weight/carton
4ft	ZS-T8V1218T-CC	ETL/cETLus, DLC	$> 80$	18W	2250 lm	1330×230×200mm 30pieces 1X40HQ Loading=33,000pcs	12kg 15.5kg (Y-cable)
5ft	ZS-T8V1532T-CC	ETL/cETLus, DLC	$> 80$	32W	4000 lm	1630×230×200mm 30pieces 1X40HQ Loading=27,300pcs	14kg 18kg (Y-cable)
6ft	ZS-T8V1840T-CC	ETL/cETLus, DLC	$> 80$	40W	5000 lm	1930×230×200mm 30pieces 1X40HQ Loading=23,400pcs	17kg 21kg (Y-cable)

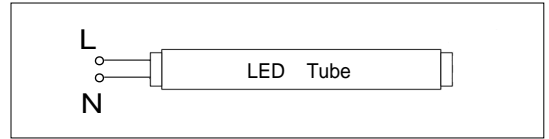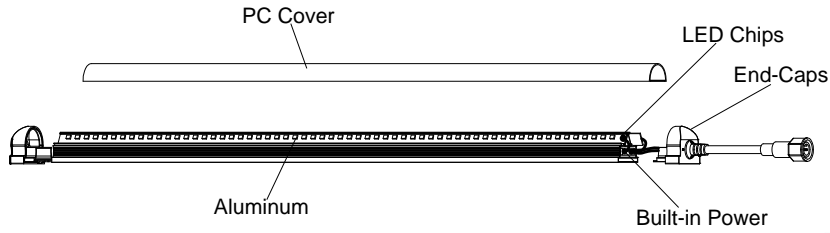


### Electric Shock Attention

Ensure the power supply has been cut off before connecting the wire, and all wiring and installation of this product are required to be operated by professionals.

## INSTALLATION INSTRUCTION

### INSTALLATION INSTRUCTION

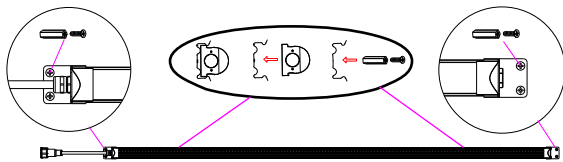

#### Disconnect the power before Installation

- Step1. Install the mounting clip. Locate the mounting clip at the position where the tube is installed on and fixed by screws. Check the fixity of the mounting clip to make sure it cannot be loose and shacked.
- Step2. Fix the tube. Align the mounting clip on the back of the tube and jam the tube into the clip firmly.
- Step3. Use male and female joint cables to connect multi tubes (A to B), max power should be less than 250W.
- Step4. Turn on the power.

#### WARNING:

1. Risk of fire or electric shock, disconnect power before installation.
2. The electrical rating of these products are 100-277Vac, the installer must determine whether they have 100-277Vac at the luminaries before installation.
3. This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
4. To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.

L  
N  
AC:100-277V

L  
N  
AC:100-277V

L  
N  
AC:100-277V

### Warning:

Make sure all the power is off before installation.  
All the installations are required to be done by professionals.